



MARINE RADARS

MR-1200RII

(12.1-inch TFT, 4kW Radome Scanner)

MR-1200TII

(12.1-inch TFT, 4kW Open Array Scanner)

MR-1200TIII

(12.1-inch TFT, 6kW Open Array Scanner)



Easy-to-see large 12.1-inch TFT display assists your safe navigation

• Three types of scanner units

MR-1200RII : 36NM range, 4kW radome scanner

MR-1200TII : 48NM range, 4kW open array scanner

MR-1200TIII: 72NM range, 6kW open array scanner



2-foot (60cm) radome scanner
for MR-1200RII



4-foot (120cm) open array scanner
for MR-1200TII/TIII

- 12.1-inch large TFT display (600x800 dots)
Slim depth (119.2mm) and light weight (4.3kg)
- Simplified ATA (Automatic Tracking Aid) function
- CPA, TCPA and alarm zone functions
- English and Korean indication
- Head-up, North-up,
Course-up & True motion*

* External bearing, speed and position data required. Depends on display mode.

OTHER FEATURES

- The MR-1200RII/TII/TIII provides many useful features : 2 EBL's, 2 VRM's, sea clutter, rain clutter, off center, interference reduction, echo stretch, zoom, trail, long pulse and automatic tuning calibration function.
- If a crew member falls overboard, mark the MOB (man overboard) point on the display. The man overboard marker keeps the position on the display and shows the bearing, distance and estimated time to the MOB point*.
- * External bearing, speed and position data are required.
- Simplified ATA (Automatic Tracking Aid) allows you to plot up to 10 targets and the radar automatically tracks the targets.
- The CPA (Closest Point Approach) and TCPA (Time to CPA) alarm gives an audible warning when the tracking targets come within the set range or time.
- The desired range and bearing can be set for the alarm zone. If other ships or islands come into the alarm zone, an audible alarm warns of a possible collision, even when the power save function turns the display off.

SPECIFICATIONS

DISPLAY UNIT

- Display type : 12.1-inch TFT LCD
- Resolution : 600x800 dots
- Minimum range : 25m (at 1/8 NM range)
- Maximum range :
 - MR-1200RII : 36NM
 - MR-1200TII : 48NM
 - MR-1200TIII : 72NM
- Range scales (NM) :
 - 1/8, 1/4, 1/2, 3/4, 1, 1.5, 2, 3, 4, 6, 8, 12, 16, 24, 32, 36, 48¹, 64², 72²
 - (*1 MR-1200TII/TIII only *2 MR-1200TIII only)
- Preheat time : 90 seconds
- Power supply : 10.2-42V DC
- Power consumption :
 - (at zero wind velocity)
 - MR-1200RII : 60W (approx.)
 - MR-1200TII : 70W (approx.)
 - MR-1200TIII : 80W (approx.)
- Usable Temp. range : -15°C to +55°C; +5°F to +131°F
- Input data format : NMEA 0183, N+1, AUX
- Output data format : NMEA 0183

SCANNER UNIT

- | | |
|---|---|
| <ul style="list-style-type: none"> • Model Name : MR-1200RII • Type : 2ft (60cm) slotted waveguide array, enclosed in a radome • Rotation speed : 24, 36, 48rpm typ. • Beamwidth Horizontal beam : 4° typ. Vertical beam : 22° typ. • Side lobe : -18dB typ. • Usable Temp. range : -25°C to +70°C; -13°F to +158°F • Usable humidity range : Less than 95% (at 40°C) • Frequency : 9410MHz ±30MHz • Modulation : P0N • Peak output power : 4kW • Pulse-width/repetition rate : 80nS/2880Hz, 80nS/2160Hz, 250nS/2160Hz, 350nS/2160Hz, 900nS/720Hz • Modulator : FET switching • Intermediate frequency : 60MHz • IF bandwidth : 10MHz, 3MHz • Tuning : Auto/manual selectable • Duplexer : Circulator • Supplied system cable : 15m; 49.2ft; OPC-1188A | <ul style="list-style-type: none"> • Model Name : MR-1200TII/MR-1200TIII • Type : 4ft (120cm) slotted waveguide array • Rotation speed : 22°, 24, 36, 48rpm typ. * MR-1200TIII only • Beamwidth Horizontal beam : 2° typ. Vertical beam : 25° typ. • Side lobe : -24dB typ. • Usable Temp. range : -25°C to +70°C; -13°F to +158°F • Usable humidity range : Less than 95% (at 40°C) • Frequency : 9410MHz ±30MHz • Modulation : P0N • Peak output power : 4kW (MR-1200TII), 6kW (MR-1200TIII) • Pulse-width/repetition rate : 80nS/2880Hz, 80nS/2160Hz, 250nS/2160Hz, 350nS/2160Hz, 900nS/720Hz, 900nS/660Hz* * MR-1200TIII only • Modulator : FET switching • Intermediate frequency : 60MHz • IF bandwidth : 10MHz, 3MHz • Tuning : Auto/manual selectable • Duplexer : Circulator • Supplied system cable : 20m; 65.6ft; OPC-1189A |
|---|---|


All stated specifications are subject to change without notice or obligation.

OPTIONS




- OPC-1077A 20m (65.6ft) SYSTEM CABLE
- OPC-1078A 30m (98.4ft) SYSTEM CABLE

DIMENSIONS

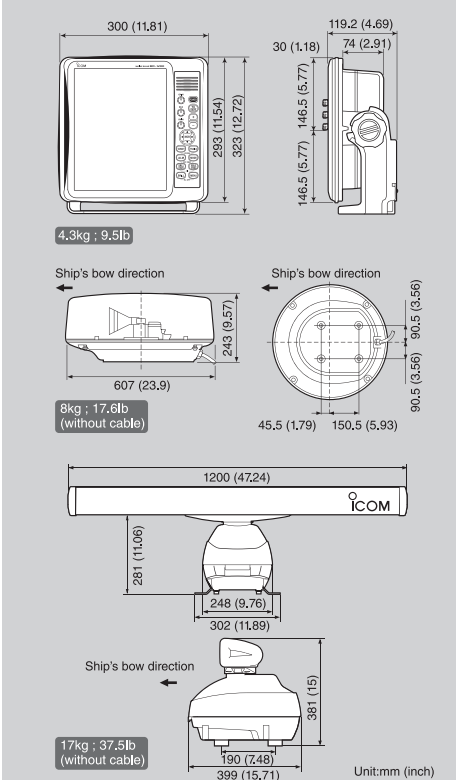

REAR PANEL VIEW

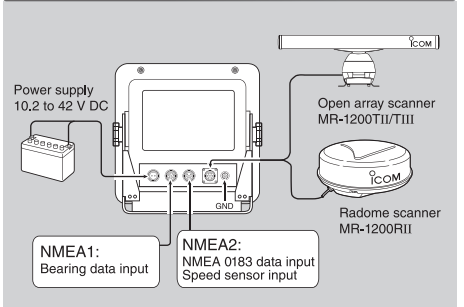

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in the United States, the United Kingdom, Germany, France, Spain, Russia, Japan and/or other countries.

Icom Inc. 1-1-32, Kami-minami, Hirano-ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world **Count on us!**

Icom America Inc.
2380 116th Avenue NE,
Bellevue, WA 98004, U.S.A.
Phone : +1 (425) 454-8155
Fax : +1 (425) 454-1509
E-mail : sales@icomamerica.com
URL : http://www.icomamerica.com

Icom New Zealand
146A Harris Road, East Tamaki,
Auckland, New Zealand
Phone : +64 (09) 274 4062
Fax : +64 (09) 274 4708
E-mail : inquiries@icom.co.nz
URL : http://www.icom.co.nz

Icom (UK) Ltd.
Blacksale House, Alitra Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone : +44 (01227) 741741
Fax : +44 (01227) 741742
E-mail : info@icomuk.co.uk
URL : http://www.icomuk.co.uk

Asia Icom Inc.
6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone : +886 (02) 2559 1899
Fax : +886 (02) 2559 1874
E-mail : sales@asia-icom.com
URL : http://www.asia-icom.com

Your local distributor/dealer:

Icom Canada
Glenwood Centre #150-6165 Highway 17,
Delta, B.C., V4K 5B8, Canada
Phone : +1 (604) 952-4266
Fax : +1 (604) 952-0090
E-mail : info@icomcanada.com
URL : http://www.icomcanada.com

Icom (Europe) GmbH
Communication Equipment
Auf der Krautweide 24
65812 Bad Soden am Taunus, Germany
Phone : +49 (6196) 76685-0
Fax : +49 (6196) 76685-50
E-mail : info@icomeurope.com
URL : http://www.icomeurope.com

Icom France s.a.s.
Zac de la Plaine,
1 Rue Brindejone des Moulinais, BP 45804,
31505 Toulouse Cedex 5, France
Phone : +33 (5) 61 36 03 03
Fax : +33 (5) 61 36 03 00
E-mail : icom@icom-france.com
URL : http://www.icom-france.com

Icom (Australia) Pty. Ltd.
Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone : +61 (03) 9549 7500
Fax : +61 (03) 9549 7505
E-mail : sales@icom.net.au
URL : http://www.icom.net.au

Icom Spain S.L.
Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone : +34 (93) 590 26 70
Fax : +34 (93) 589 04 46
E-mail : icom@icomspain.com
URL : http://www.icomspain.com

Icom Polska
81-850 Sopot, ul. 3 Maja 54, Poland
Phone : +48 (58) 550 7135
Fax : +48 (58) 551 0484
E-mail : icompolska@icompolska.com.pl
URL : http://www.icompolska.com.pl